


Classification:

Class II 
220 to 240VAC
50Hz


CCT:

3000K, 4000K, 6500K
CRI: 80 Ra

Applications:

General Lighting
Shops
Office
Retail
Education

Light Distribution:

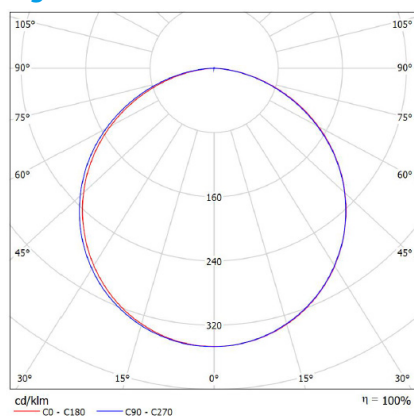


Beam Angle: 110°

Construction:

Body: Die-cast aluminum
Diffuser: Opal diffuser
Ambient temperature: 0°C to +45°C
Installation: Recessed
IP40

Dimensions:

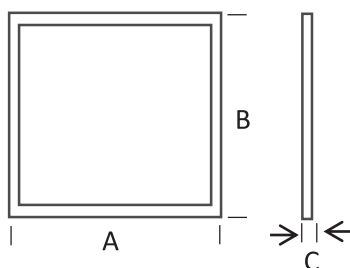

Panel Light PL 60A



Features:

- * Edge-light, smooth and uniform light distribution
- * No IR or UV radiation
- * Compliance to photobiological safety requirements
- * Eco-friendly, without mercury and hazardous substances
- * Rated lifetime: 20,000 hours



Product Variants:

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (AxBxC)
FAPL4060	40W	3200	80	595x595x8

Framer Euro-Electricals. S.A.
Passeig de Gràcia, Barcelona, Spain.
Contact: luminasales@awrostamani.com
Tel: +971-4-5262333

