


**Classification:**

Class II   
220 to 240VAC  
50Hz


**CCT:**

4000K, 6500K  
CRI: >80 Ra

**Applications:**

Parking  
Warehouses  
Workshops  
Factories  
Food industries

**Light Distribution:**

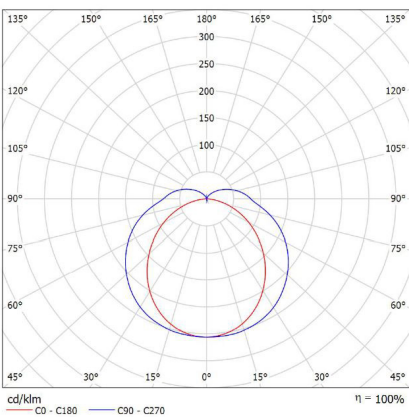


Beam Angle: 120°

**Construction:**

Body: Polycarbonate  
Diffuser: Polycarbonate.  
Clips: Plastic  
Ambient temperature: 0°C to 50°C  
Installation: Surface / Suspended  
IP65

**Dimensions:**



# Weatherproof WP 11A



**Features:**

- \* Transparent diffuser in injected polycarbonate
- \* Suitable for 4' LED tube
- \* Resistant to corrosion
- \* Easy to Install and Maintain
- \* Rated lifetime: 20,000 hours



**Product Variants:**

Product Code	Wattage	Lamp lumens (lm)	Lamp lm/W	Dimension: mm (LxWxH)
FARP136	1x18W	2000	110	1263x90x90
FARP236	2x18W	4000	110	1263x125x90

**Frater Euro-Electricals. S.A.**  
Passeig de Gràcia, Barcelona, Spain.  
Contact: [luminasales@awrostamani.com](mailto:luminasales@awrostamani.com)  
Tel: +971-4-5262333

